
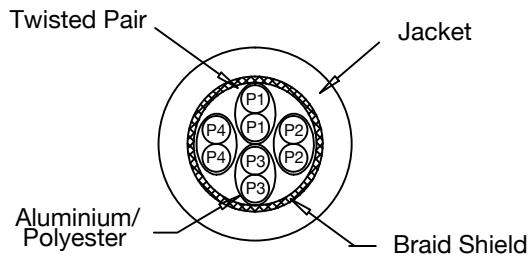



FTP Cat6 Patch Cable

linkedpro
byepcom®

Model: LP-FT7-200-BK

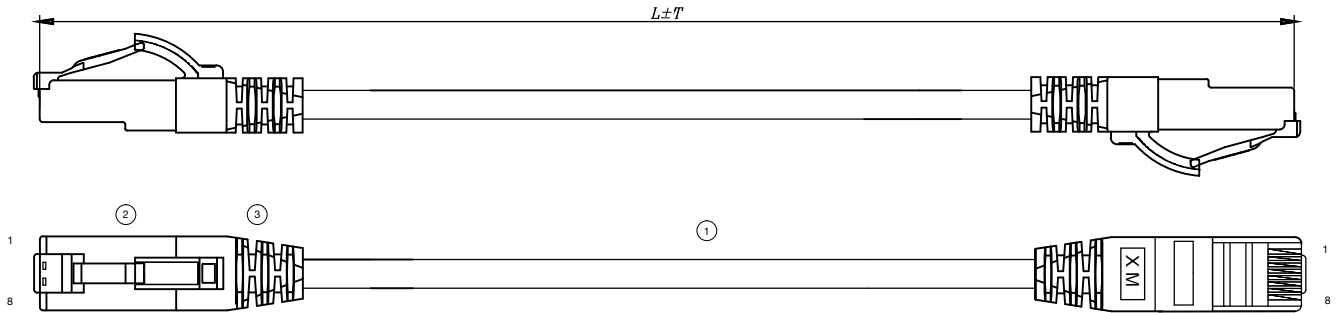

WIRING DIAGRAM

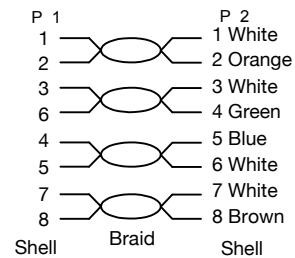

UTP Cat5e Patch Cord

Twisted pair cable with global shielding (FTP, Foiled Twisted Pair): In this type of cable as in the UTP, its peers are not shielded, but it does have a global shielding to improve its level of protection against external interference.

Cat6:
Its objective is the physical interface to connect the points of the Telecommunications room in the work area, adapting to the specifications IEEE 802.3 / 3u / 3ab in LAN networks with data transmission 10/100/1000 BaseTx with a performance that exceeds 1Gbps.

Physical Characteristics

Type	Patch cord
Colors	Black (BK)
Lengths	0.5, 1, 2, 3, 7m.
Connector type	RJ45 8(8)
End termination 1	Modular plug
End termination 2	Modular plug
Cable type	Shielding

Electrical Characteristics

Performance level	Cat6/Class E
Resistance	100 Ohms
Frequency	250 MHz
AWG	26
Number of use	1000 times

For more information visit our site: www.syscom.mx