


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY



PART NO.

RSB-250-1

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	3/23/98	JDMc

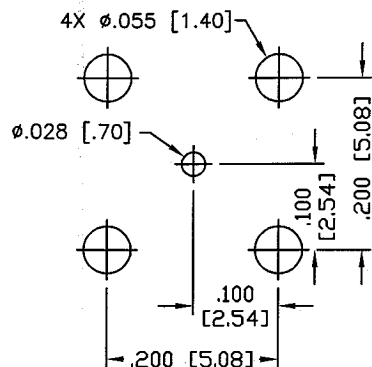

RECOMMENDED MOUNTING HOLES

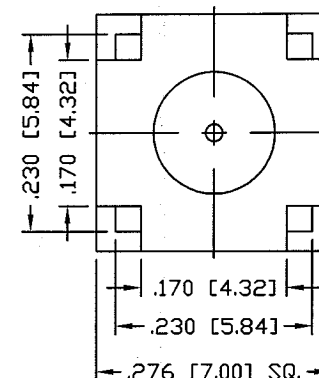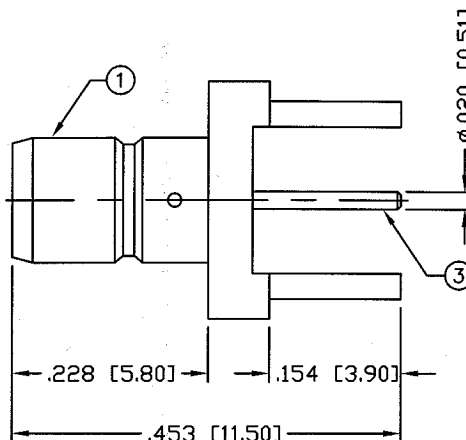

SPECIFICATIONS:

IMPEDANCE: 75 Ohms
FREQUENCY RANGE: 0-2 GHz
WORKING VOLTAGE: 335 V rms Max. @ Sea Level
INSULATION RESISTANCE: 1k M Ohms min.
TEMPERATURE RANGE: -65°C TO 165°C

1 BODY	1 BRASS	GOLD, 3μ"	008974	UNLESS OTHERWISE SPECIFIED:	RF connectors 7610 MIRAMAR RD SAN DIEGO, CA 92126 (858) 549-6340 (858) 549-6345 FAX DIVISION OF RF INDUSTRIES, LTD.			
2 INSULATOR	1 PTFE	---		1. REMOVE ALL BURRS				
3 CONTACT	1 BRASS	GOLD, 10μ"		2. BREAK ALL CORNERS & EDGES .005 R. MAX.	MINI SMB JACK P. C. B. MOUNT			
4				3. CHAMFER 1ST & LAST THREADS 45°				
5				4. SURFACE ROUGHNESS 63 FINISH MIL-STD-10	SIZE A CABLE GROUP N/A DWG NO. RSB-250-1 REV - SCALE: NTS CAD FILE OUTLINE SHEET 1 OF 1			
6				5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R.				
7				6. ALL DIMENSIONS ARE AFTER PLATING.	DIMENSIONS ARE IN INCHES AND [MILLIMETERS] UNLESS OTHERWISE NOTED TOLERANCES ARE: DECIMALS DIAMETER .XXX±.003 [.08] .XXX±.001 [.03] .XX±.005 [.13] .XX±.003 [.08]			
8								
9					DRAWN C. ZUNIGA 7/13/01 CHECKED <i>[Signature]</i> 7-16-01 ORJ DRAWN C. ZUNIGA 7/13/01			
10								
11					# DESCRIPTION QTY MATERIAL FINISH APPROVALS DATE			
12								
13								
14								