


ALL DIMENSIONS ARE REFERENCE ONLY


RP-1212-C-03

REV	DESCRIPTION	DWN	DATE	APPROVED
—	ENGINEERING RELEASE	JDM	4/24/13	JDMc

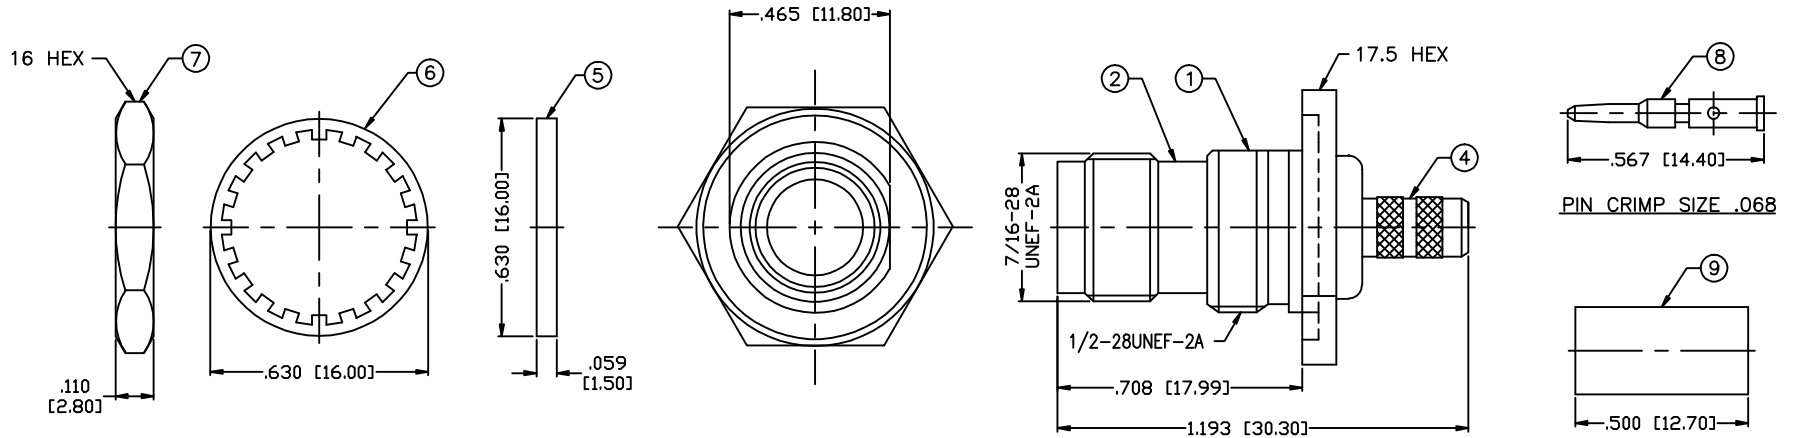


SPECIFICATIONS:

IMPEDANCE: 50 OHMS
FREQUENCY RANGE: 0-7 GHz
WORKING VOLTAGE: 500 V rms
INSULATION RESISTANCE: 5000 Megohms Minimum
TEMPERATURE RANGE: -65°C TO +165°C
FOR RG-58, 58A, 58C, 141, 141A, BELDEN 8240,
8259, 8262, 9201, 9203, 9310, 9311 & COMM/SCOPE 0268

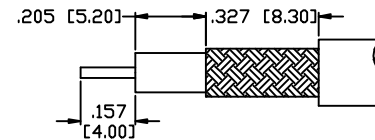

RECOMMENDED STRIPPING DIM'S



RECOMMENDED MOUNTING HOLE

1	BODY	1	BRASS	NICKEL, 100 μ "	008974	
2	PRESS BODY	1	BRASS	NICKEL, 100 μ "		
3	INSULATOR	1	PTFE	---		
4	FERRULE STUD	1	BRASS	NICKEL, 100 μ "		
5	GASKET	1	RUBBER	---		
6	LOCK WASHER	1	BRASS	NICKEL, 100 μ "		
7	HEX NUT	1	BRASS	NICKEL, 100 μ "		
8	PIN	1	BRASS	GOLD, 3 μ "		
9	FERRULE	1	BRASS	NICKEL, 100 μ "		
10					DRAWN	
11					JDMc	4/42/13
12					CHECKED	
13						
14					ORJ DRAWN	
					JDM	4/24/13
#	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS	DATE

UNLESS OTHERWISE SPECIFIED:

1. REMOVE ALL BURRS
2. BREAK ALL CORNERS & EDGES .005 R. MAX.
3. CHAMFER 1ST & LAST THREADS 45°
4. SURFACE ROUGHNESS 63 FINISH MIL-STD-10
5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R.
6. ALL DIMENSIONS ARE AFTER PLATING.

DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

UNLESS OTHERWISE NOTED
TOLERANCES ARE:

DECIMALS	DIAMETER
.XXX±.003 [.08]	.XXX±.001 [.03]
.XX±.005 [.13]	.XX±.003 [.08]

RF connectors
DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX

TNC JACK, CRIMP

REVERSE POLARITY, REAR MOUNT BULKHEAD

SIZE A	CABLE GROUP C	DWG NO. RP-1212-C-03	REV —
SCALE: NTS		CAD FILE OUTLINE	SHEET 1 OF 1