



BEACONS



LSS222


LED That Meets Strobe & Halogen Performance

The LSS222 delivers two levels of unique LED reflectors that provide a focused signal for superior brightness. Lens construction provides an excellent horizontal spread for easy identification of signal. Features include 40 flash patterns, 4 simulated rotating patterns, waterproof, shock resistant, potted circuit board, and a polycarbonate lens. With low amp draw and bright output this beacon is ideal for everyday use.

Models

PART NO.	MOUNT	LENS COLOR	LED COLOR
LSS222CX	3 Bolt, 1" Pipe or M		
LSS222A	3 Bolt, 1" Pipe or M		
LSS222B	3 Bolt, 1" Pipe or M		
LSS222R	3 Bolt, 1" Pipe or M		

Replace "X" with **A** = Amber, **B** = Blue, **R** = Red, **W** = White | Add "M" mounting extension to end of model for magnet mount

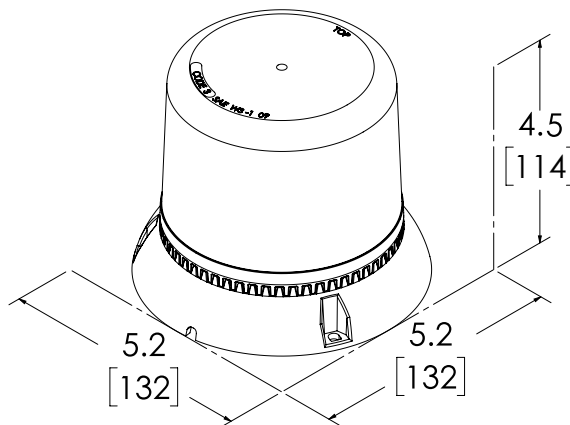

Features and Benefits

- 12-24 VDC, 2.75 Amps
- Two levels of unique LED reflectors provide a focused signal
- Includes 4 simulated rotating patterns
- Waterproof, shock resistant and potted circuit board
- Black powder coated die-cast base and polycarbonate lens
- 40 flash patterns
- Temperature Range: -22°F to +122°F (-30°C to +50°C)