

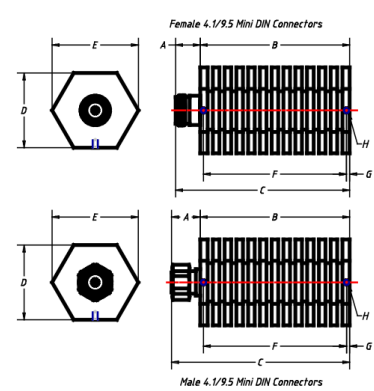
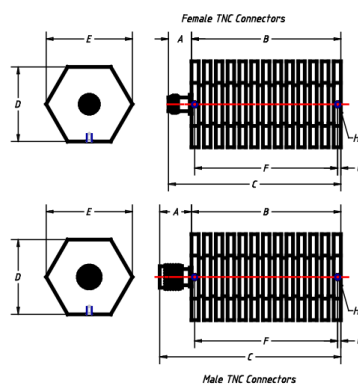
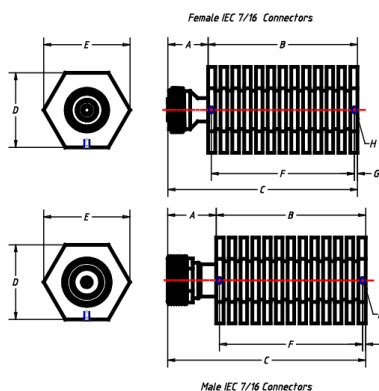
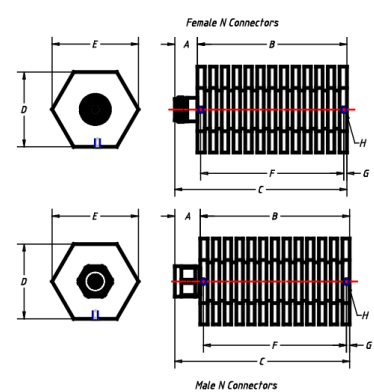
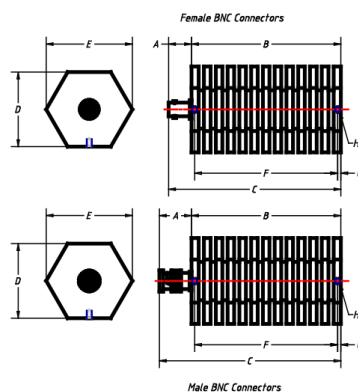
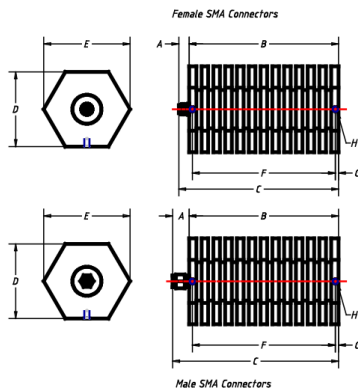

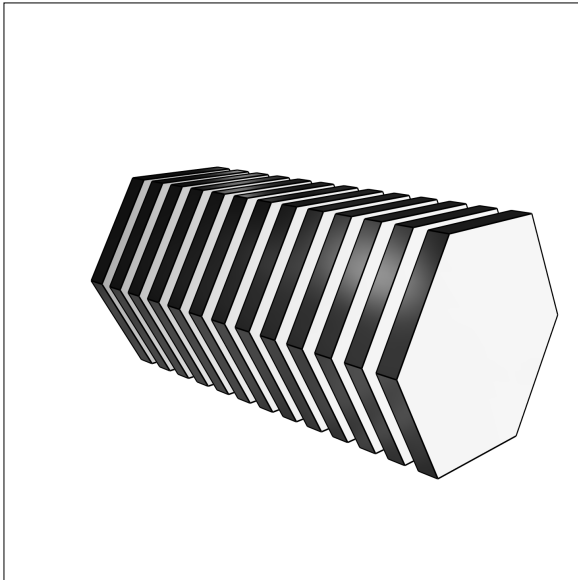
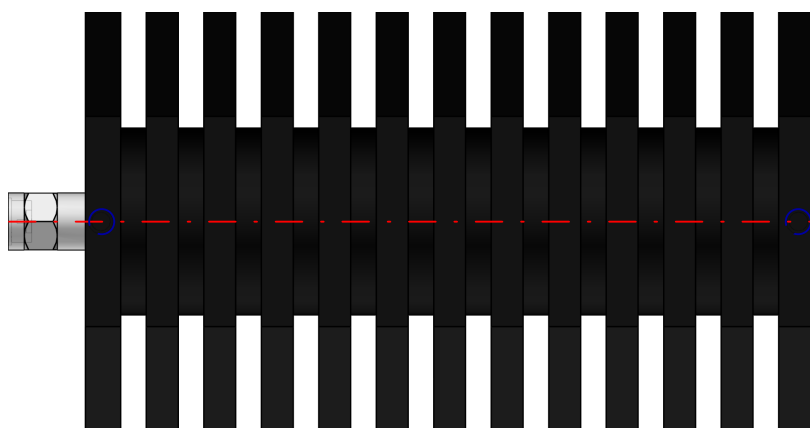


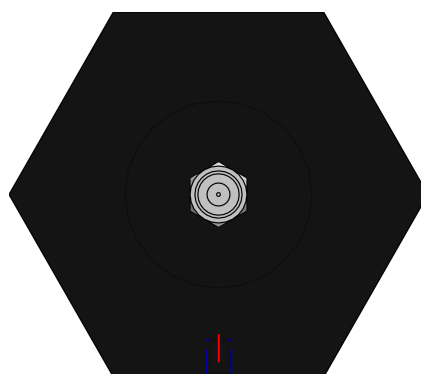

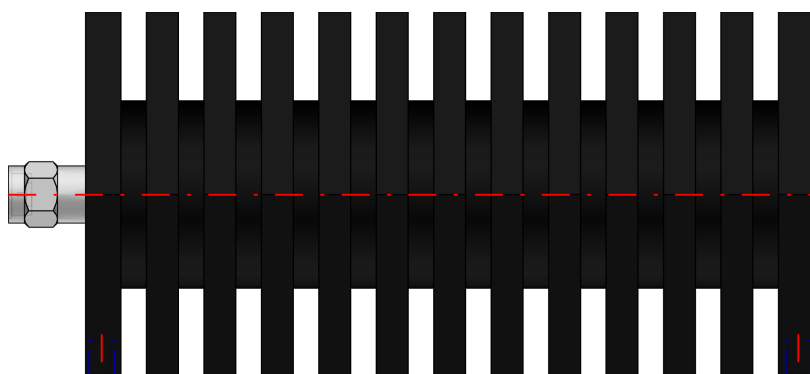

PN (Part Number)	50-T-MA
PR (Power Rating / W)	50
TYPE (Product Type)	T Series - Terminations
CGENDER (Connector Gender)	Male
CONN (Connectors)	SMA
A (A / INCH)	0.425
B (B / INCH)	4
C (C / INCH)	4.425
D (D / INCH)	2
E (E / INCH)	2.3
F (F / INCH)	3.83
G (G / INCH)	0.085
H (H / INCH)	6-32 UNC-2B
COLL (Coolant Method)	Dry, Convection Cooled
OP (Operating Position)	Any
AT (Ambient Temperature)	-40°C to 40°C
NS (Dimensions L x W / INCH)	4.425 x 2.3
WEIGHT (Weight - Approx. / lbs.)	1.13
CONNMAT (Connector Material)	Black Anodized Aluminum

Bill of material

N°	Description	Amount
1	50-T-MA	1