




PART NO. RFB-1707-D2			
REV	DESCRIPTION	DWN	DATE
-	ENGINEERING RELEASE	CZS	5/24/00
			JDMc

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

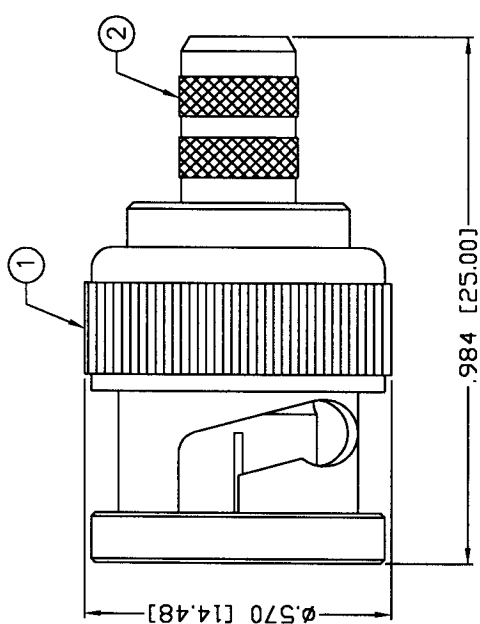


SOLDER OR USE CRIMP DIE: .042"



RECOMMENDED CRIMP DIE: .255"

SPECIFICATIONS:

IMPEDANCE: 75 Ohms
 FREQUENCY RANGE: 0-1 GHz
 WORKING VOLTAGE: 500 V rms @ sea level
 TEMPERATURE RANGE: -65°C TO 85°C
 INSULATION RESISTANCE: 5k M Ohms min.
 BELDEN 8279A, 8279A, 9209, 9209A, 82241, 88241; CommScope 2041k, 7573

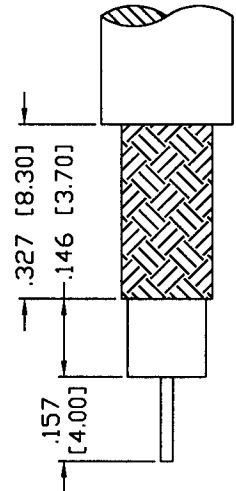

RECOMMENDED STRIPPING INSTRUCTIONS

#	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS	DATE
1	SHELL	1	BRASS	NICKEL, 100μ"	008974 DRAWN C. ZUNIGA CHECKED C. ZUNIGA ORJ DRAWN C. ZUNIGA	6/11/03
2	BODY	1	BRASS	NICKEL, 100μ"		6/11/03
3	INSULATOR	1	PTFE	---		6-12-03
4	GASKET	1	RUBBER	---		6/11/03
5	RETAINING RING	1	BRASS	NICKEL, 100μ"		
6	SPRING	1	SK5	NICKEL, 200μ"		
7	WASHER	1	BRASS	NICKEL, 100μ"		
8	PIN	1	BRASS	GOLD, 3μ"		
9	FERRULE	1	BRASS	NICKEL, 100μ"		
10						
11						
12						
13						
14						
#	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS	DATE

RF connectors
 DIVISION OF RF INDUSTRIES, LTD.
 7610 MIRAMAR RD
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

BNC CRIMP, PLUG

SIZE	CABLE GROUP	DWG NO.	REV
A	D2	RFB-1707-D2	-
SCALE: NTS		CAD FILE	OUTLINE
		SHEET	1 OF 1