
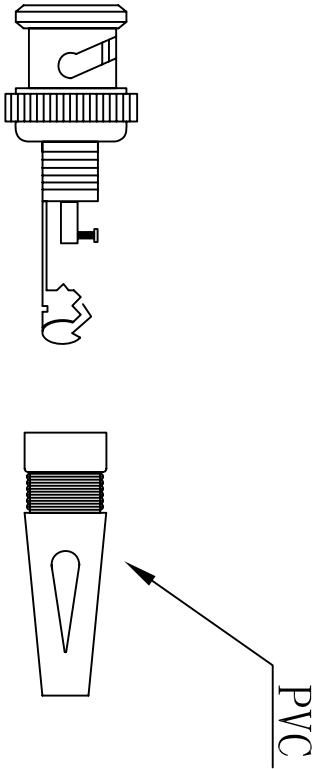


Version	Explain	Date
A		2014.12.22

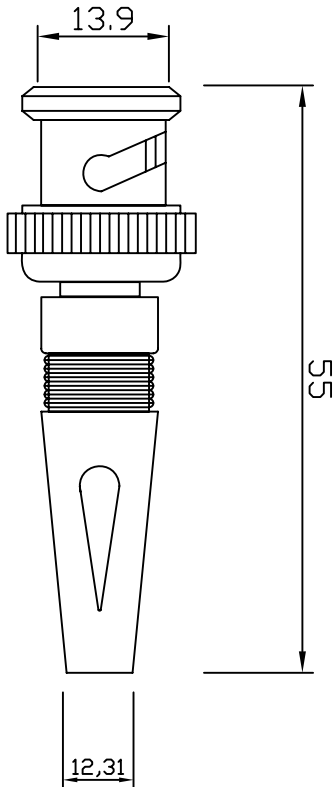

### Technical parameters:

Working temperature: -55℃~155℃

Relative humidity: ≤95% (40℃)

Main technical characteristics:

Frequency range: 0-4hz

Working voltage: 500v (50hz rms)

Standard retention: ≥0.25N

Pullout force: ≤20N

Contact resistance: ≤2.5mΩ

Insulation resistance: ≥5000mΩ

Standard withstanding voltage: 1500V (50hz rms)

Mechanical durability: 500 times

Elastic parts: beryllium bronze, gold-plated phosphor

bronze, silver plated

Inelastic parts: Nickel-plated brass

Insulating medium: PTFE

Sealing ring: silicone rubber

general tolerance		CUSTOMER:	CUST NO:	
X	H0.1	PRODUCT NO:	PART NO:	
X X	H0.05			
X XX	H0.005			
X XXX	H0.0002	BNC Macho base plastica negra	TT-RG93	
		DRAWN BY	DRAWING SIZE	1:1 A1
		CHECKED BY	UNIT	mm
		APPROVED BY	PAGE	1 OF 1
		SORTING NO.		



epcom®

# TITANIUM

BNC VIDEO SOLUTIONS