



THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PART NO.

RFF-1401-D

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	4/25/06	JDMc

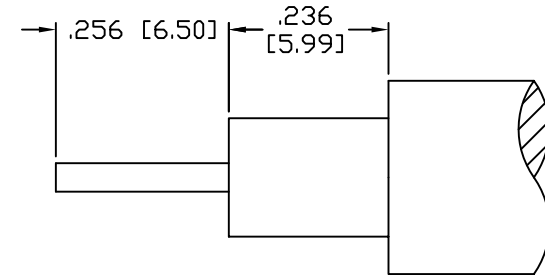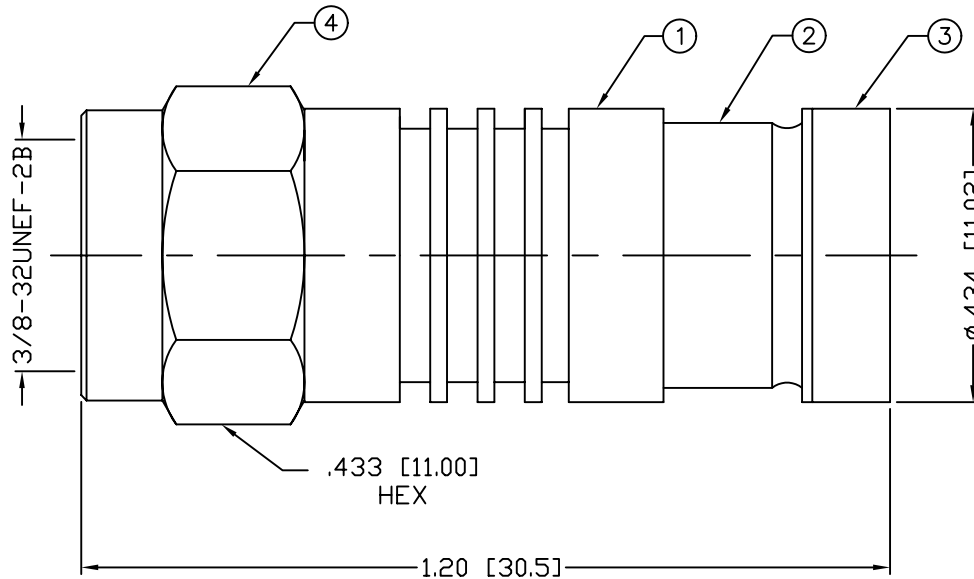

RECOMMENDED STRIPPING DIMENSIONS

USE RFA-4004-20 CRIMP TOOL

SPECIFICATIONS:

IMPEDANCE: 75 Ohms

FREQUENCY RANGE: SEE CABLE

MANUFACTURER SPECS

FOR RG-59, 59A, 59B, 62, 62A, 62C/U; ALPHA 9059, 9062,
9830, 9840, 9845; BELDEN 8221, 8241, 9169, 9204,
9228; CANARE LV-61S; CommScope 5555, 5560, 5563

1	BODY	1	BRASS	NICKEL, 100 μ "	-----
2	COMPRESSION PLASTIC	1	----	----	
3	RING	1	BRASS	NICKEL, 100 μ "	
4	SHELL	1	BRASS	NICKEL, 100 μ "	
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
#	DESCRIPTION	QTY	MATERIAL	FINISH	DATE

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]
UNLESS OTHERWISE NOTED
TOLERANCES ARE:

DECIMALS

DIAMETER

RFconnectors
DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX

F PLUG

COMPRESSION CLAMP, WATERPROOF

SIZE A	CABLE GROUP D	DWG NO. RFF-1401-D	REV —
SCALE: NTS	CAD FILE OUTLINE	SHEET 1	OF 1