

FP20107-3

(FP20107*3)

Cavity filter, bandpass, high Q, one 7" can, 148-174 MHz

- Aluminum cylinder with brass and copper coaxial inner conductor
- Silver plating and chromate conversion coating limit corrosion and enhance performance
- Temperature compensated for extremely low frequency drift



Electrical Specifications


Frequency range	MHz	148 to 174
Impedance	Ω	50

Mechanical Specifications

Height	in (mm)	32.5 (826)
Width	in (mm)	7 (178)
Weight	lbs (kg)	10 (4.5)
Input connector		N (female)
Output connector		N (female)

Environmental Specifications

Temperature range	$^{\circ}\text{F}$ ($^{\circ}\text{C}$)	-22 to +140 (-30 to +60)
-------------------	---	--------------------------

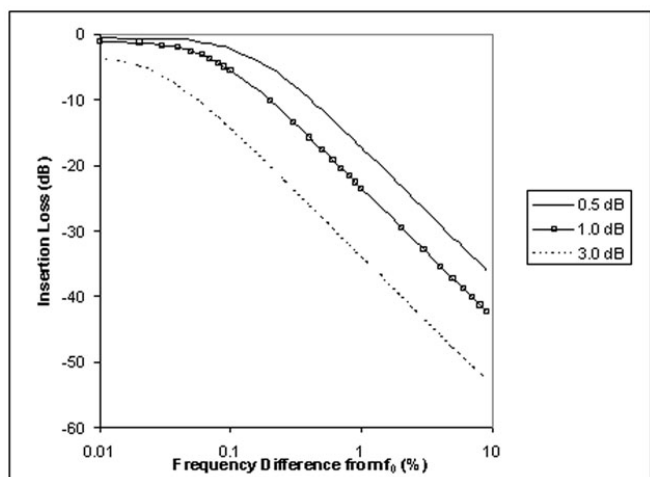

Region	United States, South & Central America	Europe, Middle East and Africa	Canada and rest of the world
Telephone	USA: 1 800 263 3275 International: +1 716 874 3682	International: +44 (0) 1223 42 03 03	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salescan@sinctech.com