


Fiber Defender® 300 Series Outdoor Enclosure Specification Sheet


The Fiber SenSys® Outdoor Enclosure offers field deployment of our FD322, FD331/2 and FD341/2 Alarm Processing Units (APU). Included with this robust outdoor enclosure is a DIN rail-mounted power supply and tamper switch. This enclosure includes a backplane that is engineered with threaded mounting holes for the APU and a cable management system to ensure fast, professional installation.



Front View

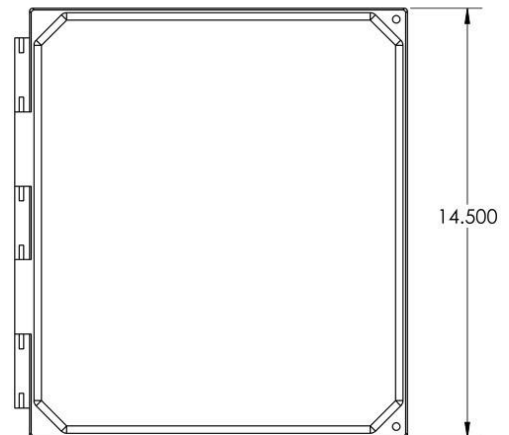

Side View

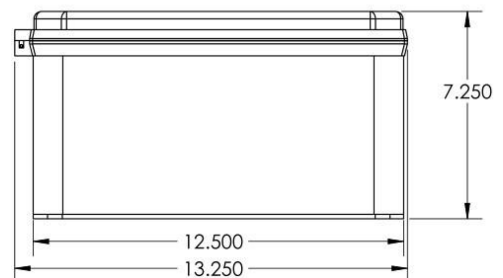

FEATURES

- Outdoor-rated enclosure
- Custom 300 Series APU mounting panel
- Power supply with international input
- Cable management components
- Tamper switch
- 35mm DIN rail

ENCLOSURE SPECIFICATIONS

- Polycarbonate construction
- NEMA 4X and IP66 rated
- Dimensions: 14" x 12" x 6" (352mm x 307mm x 151mm)
- UV Resistant
- Versatile mounting tabs

For more information, contact us at:
info@fibersensys.com
 Tel: +1(503) 692-4430
 Toll free (US) +1(800) 641-8150
www.fibersensys.com