




CONNECTOR

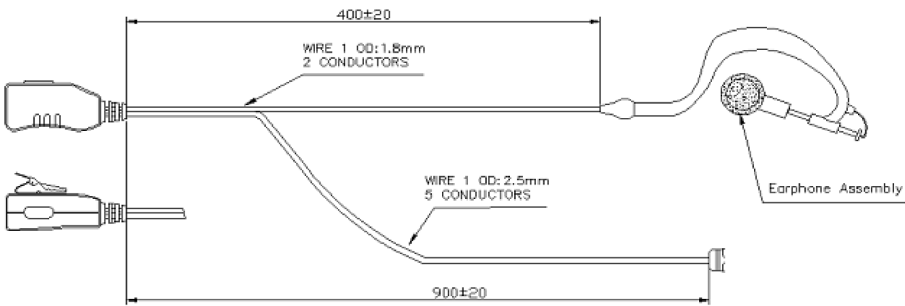

Speaker Specification:	
Type	Moving coil dynamic speaker
Impedance	32Ω±15% @1KHZ
Sensitivity	101±3dB @1KHZ 1mW
Frequency respond	100~4.5KHz
Rated input power	1mW
Maximum input power	10mW

Microphone Specification	
Sensitivity Range	-38±2dB RL=2.2KΩ Vs=2.0V(DC) 0dB=1V/Pa
Impedance Max	2.2KΩ 1kHz (RL=2.2KΩ)
Frequency	100-10KHz
Current Consumption Max	0.5uA RL=2.2KΩ Vs=3.0V(DC)
Operation Voltage Range	1.0V-10V (DC)
Max Sound pressure Level	115dB S.P.L THD<5% at 1KHz