


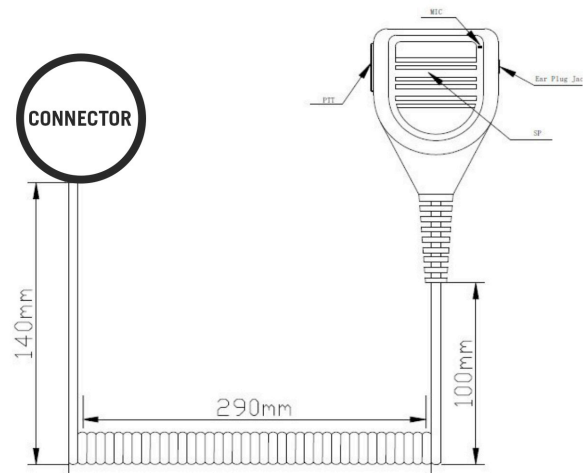

Model: **TX309**-(xxx)

Connector Suffix		Radio Models
H05		HYTERA PD-706/PD-786/PT-580
Speaker Specification:		
Size:	Ø 12.5 * 2.0 mm	
Sensitivity:	92 ± 3 dB / 1 Watt 0.5 Meter	
Impedance:	8 Ω ± 15% at 1000 Hz	
Frequency range:	(F0) ~ 20 kHz	
Rated input power:	F0 ~ 9 kHz	
Maximum input power:	500 mW	
Microphone Specification:		
Size:	Ø 6.0 * 2.7 mm	
Sensitivity:	-30 ± 3 dB (0 dB = 1 V/Pa at 1 kHz)	
Impedance:	2.2 kΩ 1 kHz (RL = 2.2 kΩ)	
Frequency:	20 ~ 20 kHz (0 dB = 1 V/Pa, 1 kHz)	
Operation voltage range:	1.0 - 10 V(DC)	
Operating voltage:	1.0 V - 10 V(DC)	
Cable		
Diameter:	Ø 5.5 mm	
Material:	PU	
Operating temperature:	-30 ~ 120°C	