





THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PART NO.

RSB-4300-1

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	8/1/96	JDMc

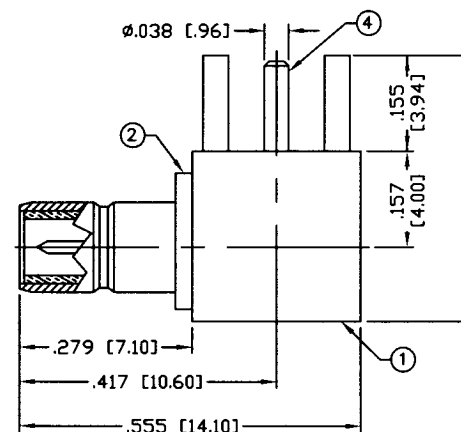

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
VOLTAGE RATING: 350 V PEAK
FREQUENCY RANGE: 0-4 GHz
TEMPERATURE RANGE: -65°C TO 165°C

1	BODY	1	BRASS	GOLD, 3 μ"
2	PRESS BODY	1	BRASS	GOLD, 3 μ"
3	INSULATOR	1	PTFE	---
4	PIN	1	BRASS	GOLD, 30 μ"
5	INSULATOR	1	PTFE	---
6	LOCK WASHER	1	BRASS	GOLD, 3 μ"
7	HEX NUT	1	BRASS	GOLD, 3 μ"
8				
9				
10				
11				
12				
13				
14				
#	DESCRIPTION	QTY	MATERIAL	FINISH

008974

UNLESS OTHERWISE SPECIFIED:

1. REMOVE ALL BURRS
2. BREAK ALL CORNERS & EDGES .005 R. MAX.
3. CHAMFER 1ST & LAST THREADS 45°
4. SURFACE ROUGHNESS 63 FINISH MIL-STD-10
5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R.
6. ALL DIMENSIONS ARE AFTER PLATING.

DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

UNLESS OTHERWISE NOTED
TOLERANCES ARE:

DECIMALS	DIAMETER
.XXX±.003 [.08]	.XXX±.001 [.03]
.XX±.005 [.13]	.XX±.003 [.08]

DRAWN
JDMc
CHECKED
ORJ DRAWN
K. MAXWELL
7/25/05
7-21-05
8/1/96

RF connectors
DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX

SMB JACK

RIGHT ANGLE, PCB MOUNT

SIZE	CABLE GROUP	DWG NO.	REV
A	N/A	RSB-4300-1	—
SCALE: NTS		CAD FILE OUTLINE	SHEET 1 OF 1